




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>5</sup> : <b>H04B 7/02, 17/02</b>		<b>A1</b>	(11) International Publication Number: <b>WO 94/08403</b>
		(43) International Publication Date: <b>14 April 1994 (14.04.94)</b>	
(21) International Application Number: <b>PCT/US93/08700</b>		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>17 September 1993 (17.09.93)</b>			
(30) Priority data: <b>07/955,385 1 October 1992 (01.10.92) US</b>			
(71) Applicant: <b>MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</b>		Published <i>With international search report.</i>	
(72) Inventor: <b>JASINSKI, Leon ; 2924 E. Las Olas Blvd., Fort Lauderdale, FL 33301 (US).</b>			
(74) Agents: <b>BERRY, Thomas, G. et al.; Motorola, Inc., Intellectual Property Dept., 1500 Gateway Blvd-MS96, Boynton Beach, FL 33426-8292 (US).</b>			

(54) Title: **SELECTIVE CALL RECEIVER CAPABLE OF REQUESTING INFORMATION FROM A COMMUNICATION SYSTEM AND METHOD THEREFOR**

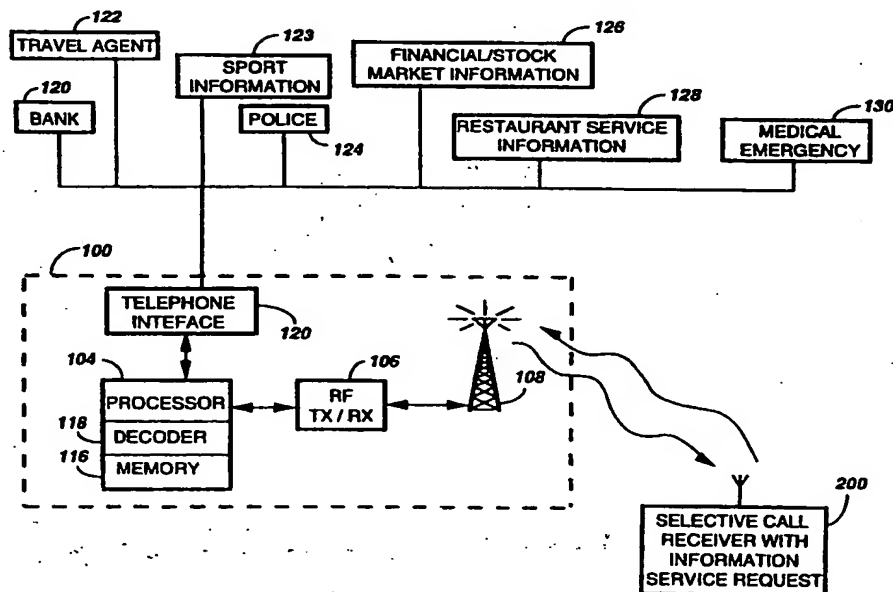

## (57) Abstract

A communication system has a base station (100) having memory (116) for storing information within a plurality of information files relating to a plurality of information services (120, 122, 123, 124, 126, 128, 130). A receiver receives an information service request for requesting information within at least one of the plurality of information files from a selective call receiver (200). A transmitter transmits the information requested from within the at least one information service file to the selective call receiver (200). The selective call receiver (200) includes a generator for generating the information service request and a transmitter (212) transmitting the information service request. The selective call receiver receives the information transmitted from the base station (100) in response to the information service request and a display (208) displays the received information.